


70-K-62(25) - SPEEDLINE System Data Sheet - Version V1 (24-10-23)

SPEEDLINE 70mm 'C' Stud Partition @600mm Ctrs,
with 2x Knauf 15mm Fire Panel each side, 25mm
APR

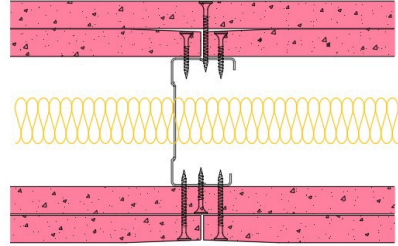

System Performance Breakdown

Fire Resistance:

BS476 Part 22:1987:

Test Ref & Date or Applied Ref & Report:

Max Height:

Thickness:

Duty Grade: BS 5234: Part 2:1992:

Sound Insulation:

120/120 Minutes (Integrity/Insulation).

BRE 288793 - BRE Report P102396-1011B

Refer to Speedline Specification Clause

132 mm. (At Base Track, Excluding Finishes)

Severe - Annexes A-F

49 R_wdB, Date Tested or Assessed Against - 02/03/2009


SRL Sound Research
Laboratories Limited

Holbrook House, Little Waldingfield,
Sudbury, Suffolk CO10 0TH
Tel: (01787) 247595 Fax: 01787 248420
e-mail: srl@soundresearch.co.uk



Test Certificate No. 5505

Contract: C/08/SL/20522
Page: 1 of 1
Date: 20 April 2009

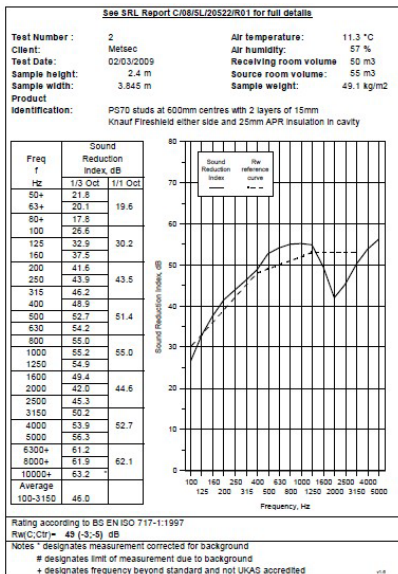

TESTED AT ONE OF THE UKAS
ACCREDITED LABORATORIES
BELOW

B.T.C
(H-Ref on Graph)

B.R.E

AIRO

S.R.L

George Thomson
George Thomson
Project Engineer

Trevor Hickman
Trevor Hickman
Deputy Technical Manager

SPEEDLINE Drywall Systems, Adsetts House, 16 Europa View, Sheffield Business Park, Sheffield, S9 1XH.

Tel: 0114 231 8030.

Email: enquiries@speedlinedrywall.co.uk

(As per the requirements set out in ISO/IEC 17025:2017 regarding test data the results stated have been carried out by voestalpine Metsec plc as part of the contract to supply Speedline Metal Sections to SIG Plc)