


50-B-54(50) - SPEEDLINE System Data Sheet - Version V1 (24-10-23)

SPEEDLINE 50mm 'C' Stud Partition @600mm Ctrs,
with BG Gyproc 15mm SoundBloc each side,
50mm APR

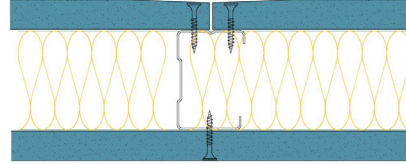

System Performance Breakdown

Fire Resistance:

BS476 Part 22:1987:

Test Ref & Date or Applied Ref & Report:

Max Height:

Thickness:

Duty Grade: BS 5234: Part 2:1992:

Sound Insulation:

30/30 Minutes (Integrity/Insulation).

BTC 17439F - BRE Report P102396-1011A

Refer to Speedline Specification Clause


82 mm. (At Base Track, Excluding Finishes)

Heavy - Annexes A-F

45 R_w dB, Date Tested or Assessed Against - 50-B-53(25)+1dB

Test Code:
H17481AA
Test Date:
13/07/2011

Freq. Hz	R dB
50	21.9
63	15.2
80	11.2
100	14.6
125	20.2
160	27.3
200	32.6
250	37.1
315	42.4
400	47.3
500	51.4
630	55.1
800	58.0
1 000	59.7
1 250	62.2
1 600	64.1
2 000	62.5
2 500	52.6
3 150	41.8
4 000	43.5
5 000	46.9
6 300	
8 000	
10 000	

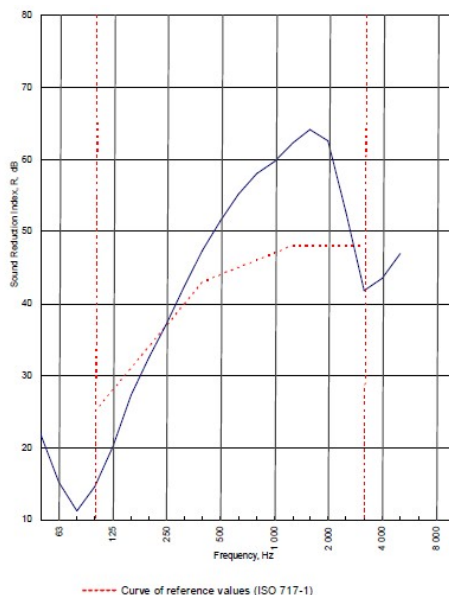

Rating according to BS EN ISO 717-1:1997 **R_w (C;Ctr) = 44 (-4;-11) dB**
 Max dev. 10.4 dB at 100 Hz

Evaluation based on laboratory measurement results obtained by an engineering method:	$C_{50-3150}$ = -6 dB	$C_{50-5000}$ = -5 dB	$C_{100-8000}$ = -3 dB
	$C_{50-3150}$ = -15 dB	$C_{50-4000}$ = -15 dB	$C_{50-4000}$ = -11 dB

TESTED AT ONE OF THE UKAS ACCREDITED LABORATORIES BELOW

- B.T.C (H-Ref on Graph)
- B.R.E
- AIRO
- S.R.L

Customer: Metsec plc Hepsec Division

BTC 17481A: Page 9 of 11

