


92-B-53(25) - SPEEDLINE System Data Sheet - Version V1 (24-10-23)

SPEEDLINE 92mm 'C' Stud Partition @600mm Ctrs,
with BG Gyproc 12.5mm SoundBloc each side,
25mm APR

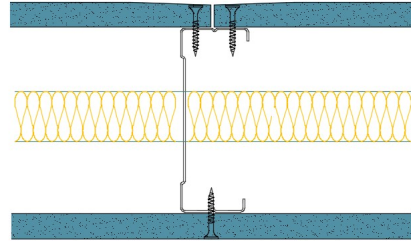

System Performance Breakdown

Fire Resistance:

BS476 Part 22:1987:

Test Ref & Date or Applied Ref & Report:

Max Height:

Thickness:

Duty Grade: BS 5234: Part 2:1992:

Sound Insulation:

30/30 Minutes (Integrity/Insulation).

BTC 17439F - BRE Report P102396-1011A

Refer to Speedline Specification Clause


119 mm. (At Base Track, Excluding Finishes)

Medium - Annexes A-F

46 R_wdB, Date Tested or Assessed Against - 70-B-53(25)+1dB

Test Code:
H17479AA
Test Date:
13/07/2011

Freq. Hz	R dB
50	27.9
63	17.0
80	14.8
100	15.6
125	22.2
160	28.9
200	37.4
250	37.5
315	38.7
400	43.9
500	49.2
630	50.3
800	54.0
1 000	55.3
1 250	56.9
1 600	57.5
2 000	48.8
2 500	44.1
3 150	48.0
4 000	52.7
5 000	53.8

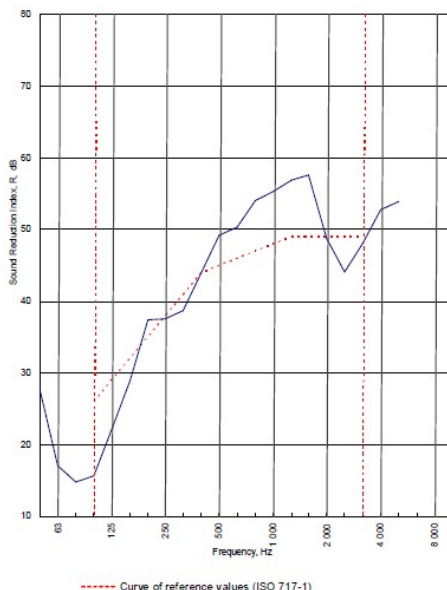

Rating according to BS EN ISO 717-1:1997	R_w (C;Ctr) = 45 (-4;-11) dB		
Evaluation based on laboratory measurement results obtained by an engineering method:	C ₅₀₋₂₅₀ = -5 dB	C ₅₀₋₅₀₀ = -4 dB	C ₁₀₀₋₅₀₀ = -3 dB
	C ₅₀₋₃₁₅₀ = -14 dB	C ₅₀₋₅₀₀₀ = -14 dB	C ₅₀₋₁₀₀₋₅₀₀₀ = -11 dB

TESTED AT ONE OF THE UKAS ACCREDITED LABORATORIES BELOW

B.T.C (H-Ref on Graph)

B.R.E

AIRO

S.R.L

Customer: Metsec plc Hepsec Division

BTC 17479A: Page 8 of 10



SPEEDLINE Drywall Systems, Adsetts House, 16 Europa View, Sheffield Business Park, Sheffield, S9 1XH.

Tel: 0114 231 8030.

Email: enquiries@speedlinedrywall.co.uk

(As per the requirements set out in ISO/IEC 17025:2017 regarding test data the results stated have been carried out by voestalpine Metsec plc as part of the contract to supply Speedline Metal Sections to SIG Plc)