


92-B-55 - SPEEDLINE System Data Sheet - Version V1 (24-10-23)


SPEEDLINE 92mm 'C' Stud Partition @600mm Ctrs, with BG Gyproc 12.5mm FireLine each side

System Performance Breakdown

Fire Resistance: BS476 Part 22:1987: Test Ref & Date or Applied Ref & Report: Max Height: Thickness: Duty Grade: BS 5234: Part 2:1992: Sound Insulation:

30/30 Minutes (Integrity/Insulation). BTC 17439F - BRE Report P102396-1011A Refer to Speedline Specification Clause 119 mm. (At Base Track, Excluding Finishes) Medium - Annexes A-F 37 RwdB, Date Tested or Assessed Against - 70-B-51

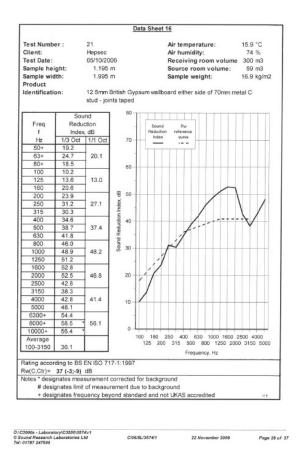



SPEEDLINE Drywall Systems, Adsetts House, 16 Europa View, Sheffield Business Park, Sheffield, S9 1XH.

Tel: 0114 231 8030. Email: <u>enquiries@speedlinedrywall.co.uk</u>

(As per the requirements set out in ISO/IEC 17025:2017 regarding test data the results stated have been carried out by voestalpine Metsec plc as part of the contract to supply Speedline Metal Sections to SIG Plc)