


70-K-59 - SPEEDLINE System Data Sheet - Version V1 (24-10-23)

SPEEDLINE 70mm 'C' Stud Partition @600mm Ctrs,
with 2x Knauf 12.5mm Soundshield Plus each side

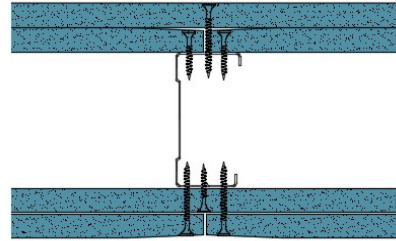

System Performance Breakdown

Fire Resistance:

BS476 Part 22:1987:

Test Ref & Date or Applied Ref & Report:

Max Height:

Thickness:

Duty Grade: BS 5234: Part 2:1992:

Sound Insulation:

60/60 Minutes (Integrity/Insulation).

BRE 208596 - BRE Report P102396-1011B

Refer to Speedline Specification Clause


122 mm. (At Base Track, Excluding Finishes)

Severe - Annexes A-F

53 R_w dB, Date Tested or Assessed Against - 27/06/2011

Test Code:
H17434AA
Test Date:
27/06/2011

Freq. Hz	R dB
50	25.1
63	17.6
80	14.3
100	27.5
125	32.7
160	36.3
200	41.4
250	44.4
315	46.0
400	49.8
500	53.1
630	54.6
800	58.7
1 000	60.5
1 250	63.4
1 600	66.3
2 000	65.4
2 500	54.0
3 150	50.9
4 000	54.3
5 000	57.6
6 300	
8 000	
10 000	

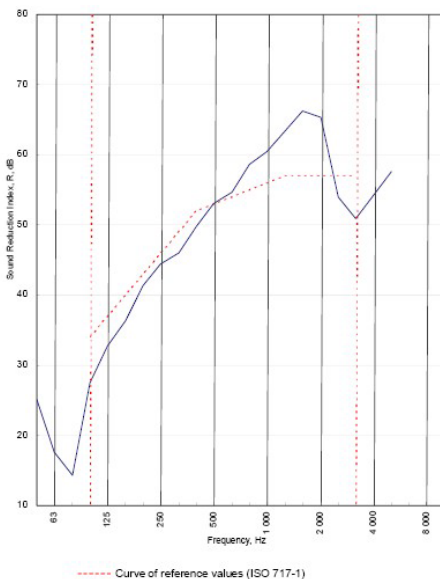

Rating according to BS EN ISO 717-1:1997
 R_w (C;Ctr) = 53 (-3;-8) dB
 Max dev. 6.5 dB at 100 Hz

C_{50-500} = -8 dB	$C_{50-6300}$ = -7 dB	$C_{100-5000}$ = -2 dB
$C_{125-3150}$ = -19 dB	$C_{125-5000}$ = -19 dB	$C_{125-6300}$ = -8 dB

TESTED AT ONE OF THE UKAS ACCREDITED LABORATORIES BELOW

B.T.C (H-Ref on Graph)

B.R.E

AIRO

S.R.L

Customer: Metsec plc Hepsec Division

BTC 17434A: Page 8 of 10



SPEEDLINE Drywall Systems, Adsetts House, 16 Europa View, Sheffield Business Park, Sheffield, S9 1XH.

Tel: 0114 231 8030.

Email: enquiries@speedlinedrywall.co.uk

(As per the requirements set out in ISO/IEC 17025:2017 regarding test data the results stated have been carried out by voestalpine Metsec plc as part of the contract to supply Speedline Metal Sections to SIG Plc)