
Board Thickness	Speedline Drywall Fixing Length
12.5mm & 15mm	25mm
12.5mm + 12.5mm	25mm + 38mm
12.5mm + 15mm	25mm + 42mm
15mm + 15mm	25mm + 42mm

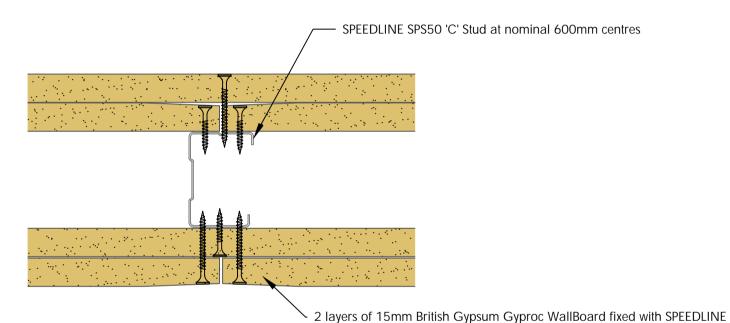

All performance date and system specifications are for systems constructed with materials & components as shown. The inclusion or substitution of any other manufacturers material or components could invalidate test data and system performance and permission must be given in writing by SIG-FL.

The information is provided in good faith and is based upon details received which are

We accept no liability for its accuracy, adequacy or completeness. Recipients must satisfy themselves as to its suitability as we do not accept responsibility for any claims or consequential loss. Acceptance of the content and subsequent design responsibility resisently with the recipients who should then produce accepted details on their own

CDR No: 50-B-58

Double Layer

'C' Stud - Staggered Joint

DATE: 18/10/19

O/19 Adsetts House, 16 Europa View, Sheffield Business Park,

Sheffield, S9 1XH.

T: 0114 231 8030

table for fixing length.

SPEEDLINE
DRYWALL SYSTEMS | Part of place | Pa

Drywall Screws at 300mm centres (200mm centres at external angles). Ref to

Details to be read in conjunction with project specification guidelines

E: enquiries@speedlinedrywall.co.uk