



# Channels and Angles



[www.speedlinedrywall.co.uk](http://www.speedlinedrywall.co.uk)

**REVISED**  
09/2024

# Contents

Speedline Channels	131
Speedline Angles	132

# CHANNELS AND ANGLES SPEEDLINE CHANNELS

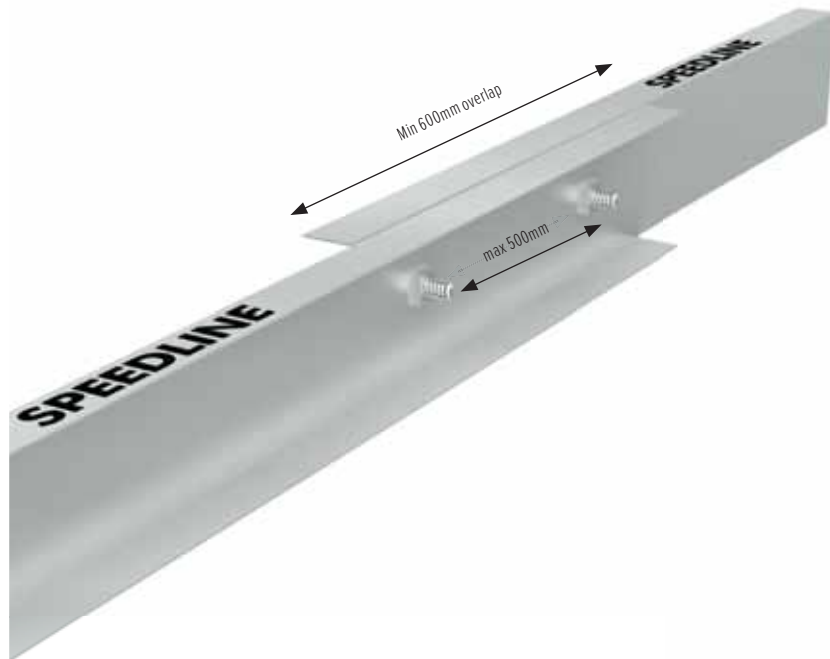


The Speedline range of channel sections have been designed to form sub grids for supporting any type of suspended ceiling.

For further assistance please contact [enquiries@speedlinedrywall.co.uk](mailto:enquiries@speedlinedrywall.co.uk) with details listed below so that the correct channel size can be calculated for your project.

- Type of span – single or continuous.
- Length of span – in metres.
- Total weight to be supported from sub grid (kg/square metre).

Channel Connectors are available for SU07 only. For joining all other channels, they must be bolted back to back with a minimum overlap of 600mm. A minimum of two bolts must be used, at 500mm minimum centres.

Channels – SU07, SU08, SU09, SU12




## SPEEDLINE CHANNELS

Product Code	Width (mm)	Flange Dimensions (mm)	Nominal Gauge (mm)	Stock Lengths (Metre)	Weight per Length (Kgs)
SU07	38	19	1.5	3.00	2.19
				3.60	2.63
SU08	63	25	1.5	3.60	4.12
SU12	100	50	1.5	4.80	10.00

## ACCESSORIES (CHANNELS)


Product Code	Product Description	Weight per Box (Kgs)
AZ11B	38mm Channel Connectors for SU07 only	10.20




## CHANNELS AND ANGLES

# SPEEDLINE ANGLES


Angles – SL26

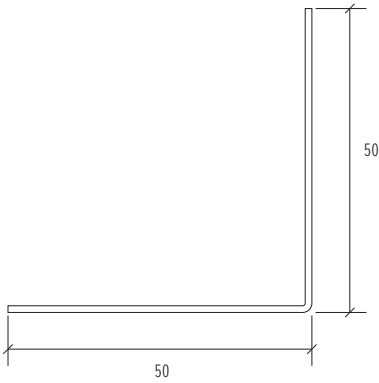

Angles – SL04, SSL06



Angles – SL12

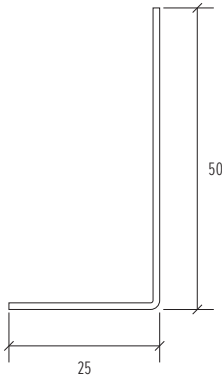

### SPEEDLINE ANGLES

Also available in Speedline Low Carbon using the product codes below with a D prefix

Equal Angles					
Product Code	Product Description	Nominal Gauge (mm)	Stock Lengths (Metre)	Weight per Length (Kgs)	
SSL06 / DSSL06	Speedline 25mm base x 25mm leg (90°)	0.7	3.60	0.89	
SL13 / DSSL13	Speedline 50mm base x 50mm leg (90°)	0.7	3.00 3.60	1.59 1.88	
SL26	Speedline 50mm base x 50mm leg (90°)	1.5	3.60	3.68	
Unequal Angles					
SL12 / DSSL12	Speedline 50mm base x 25mm leg (90°)	0.7	3.00 3.60	1.15 1.38	



Primarily designed for the suspension of sub grids and ceiling systems. Speedline Angles can be used for many general applications in ceilings, dry lining and also for cloaking deflection heads in partitioning systems.

### Sectors

- Healthcare
- Education
- Commercial
- Offices
- Retail
- Student Accommodation

CHANNELS AND ANGLES  
**CHANNELS**

