

# Deep Leg Track

U-shaped steel section designed with 50mm tapered legs to enable friction fitting of studs.

## MATERIAL PROPERTIES

### Product Material

DX51D Steel

### Product Finish

140 micron galvanised coating

### Fire Classification

A1

### Tensile Strength


270-500N/mm<sup>2</sup>

### Density

7.85g/cm<sup>3</sup>

### Minimum Elongation A80%

22% (A80)

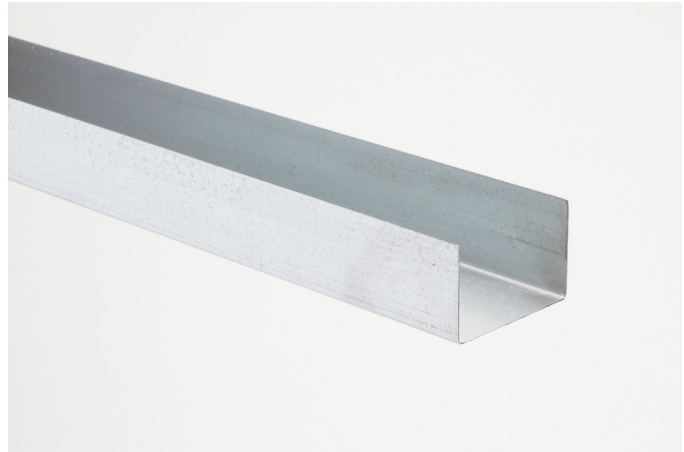

## PRODUCT APPLICATION

Used for partition heights between 4m and 8m. Can also be used as a head track where a deflection head of up to 30mm is required.

## FEATURES AND BENEFITS

- Our Deep Tracks can be used for partition heights between 4m and 8m
- Can be cut using tin snips or power tools
- Dimensionally accurate
- Weighing from just 1.7kg for our shortest length and width Track, they are lightweight and easy to manoeuvre
- Can also be used to form door frames
- Extra Deep tracks are also available for situations where greater height is required
- Our Deep Tracks can also be used as a head track where a deflection head of up to 30mm is needed
- For more specific technical information about our Speedline Tracks or any of our systems, please view or download our Speedline manual or contact our technical team
- Available in 3m lengths and various widths from 52mm to 148mm
- Also available in Speedline Low Carbon

Product Code	Product Range	Width	Flange Tolerance	Gauge	Stock Length	Weight per Length
10027306	SPEDT52	52mm	50mm	0.5mm	3000mm	1.67kg
10027310	PEDT62	62mm	50mm	0.5mm	3000mm	1.79kg
10027307	SPEDT72	72mm	50mm	0.5mm	3000mm	1.91kg
10027311	PEDT94	94mm	50mm	0.5mm	3000mm	2.16kg
10027317	SPDT148	148mm	50mm	0.5mm	3000mm	2.8kg