

Extra Deep Leg Track

U-shaped steel section designed with 75mm tapered legs to enable friction fitting of studs.

MATERIAL PROPERTIES

Product Material

DX51D Steel

Product Finish

140 micron galvanised coating

Fire Classification

A1

Tensile Strength


270-500N/mm²

Density

7.85g/cm³

Minimum Elongation A80%

22% (A80)

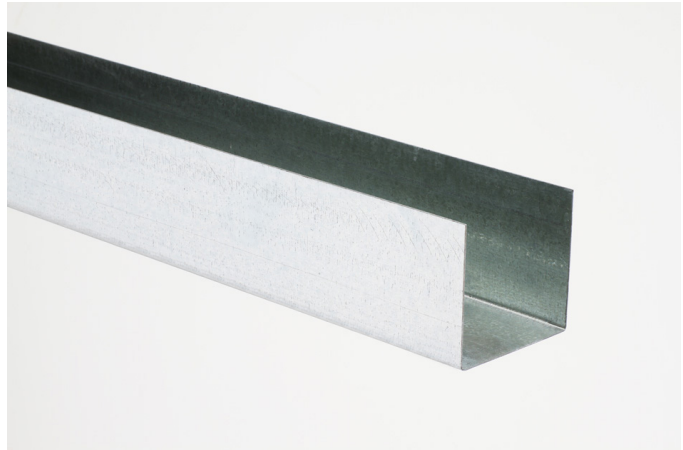

PRODUCT APPLICATION

Used for partition heights between 8m and 10.2m. Can also be used as a head track where a deflection head of up to 45mm is required.

FEATURES AND BENEFITS

- Our Extra Deep Tracks can be used for partition heights between 8m and 10.2m
- For use in multiple Speedline systems across a variety of sectors
- Can be cut using tin snips or power tools
- Dimensionally accurate
- Weighing from under 3.5kg for our shortest length and width Track, they are lightweight and easy to manoeuvre
- Can also be used to form door frames
- For more specific technical information about our Speedline Tracks or any of our systems, please view or download our Speedline manual or contact our technical team
- Available in 3m lengths and various widths from 72mm to 148mm
- Also available in Speedline Low Carbon

Product Code	Product Range	Width	Flange Tolerance	Gauge	Stock Length	Weight per Length
10027315	SPXDT72	72mm	70mm	0.7mm	3000mm	3.32kg
10027312	PXDT94	94mm	70mm	0.7mm	3000mm	3.69kg
10027318	SPXDT148	148mm	70mm	0.7mm	3000mm	4.58kg