

# Flat Bracing Strip

0.5mm gauge steel strip.

## MATERIAL PROPERTIES

### Product Material

DX51D Steel

### Product Finish

140 micron galvanised coating

### Fire Classification

A1

### Tensile Strength


270-500N/mm<sup>2</sup>

### Density

7.85g/cm<sup>3</sup>

### Minimum Elongation A80%

22% (A80)

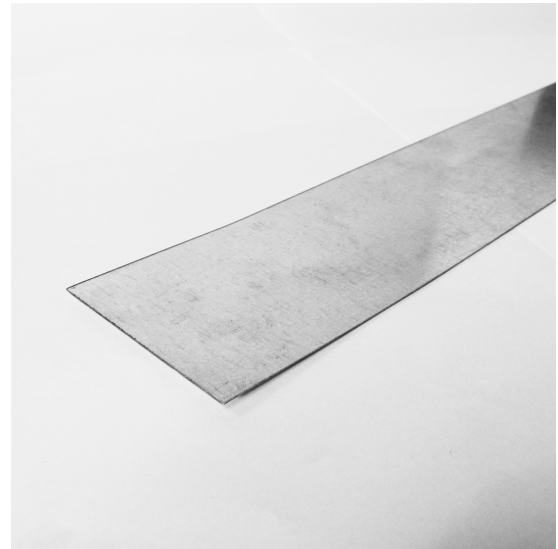

## PRODUCT APPLICATION

Used in horizontal board joints in plasterboard and within deflection head constructions.

## FEATURES AND BENEFITS

- For use in multiple Speedline systems across a variety of sectors
- Can be cut using tin snips or power tools
- Dimensionally accurate
- Available in 2.4m lengths
- For more specific technical information about our Speedline Flat Bracing Strip or any of our systems, please view or download our Speedline manual or contact our technical team

Product Code	Product Range	Width	Gauge	Stock Length	Weight per Length
10027361	FS24	70mm	0.5mm	2400mm	0.66kg