

Metal Furring Perimeter Channel

U-shaped steel section with uneven legs for use as part of the Speedline MF ceiling system.

MATERIAL PROPERTIES

Product Material

DX51D Steel

Product Finish

140 micron galvanised coating

Fire Classification

A1

Tensile Strength


270-500N/mm²

Density

7.85g/cm³

Minimum Elongation A80%

22% (A80)

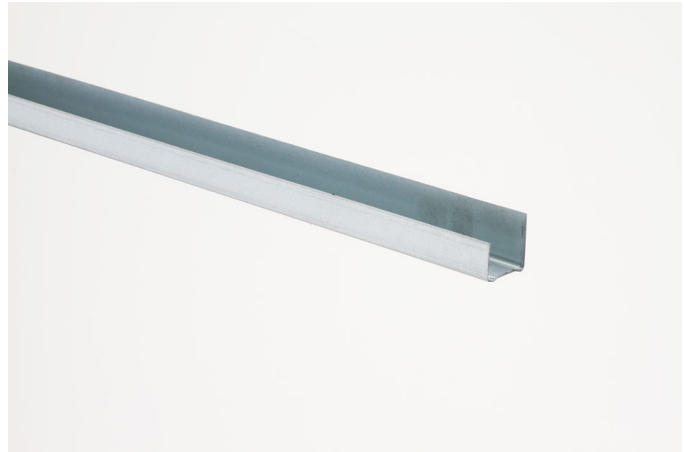

PRODUCT APPLICATION

Fixed to the perimeter of the ceiling to set the ceiling height and support the primary channel.

FEATURES AND BENEFITS

- For use in multiple Speedline systems across a variety of sectors
- Can be cut using tin snips or power tools
- Dimensionally accurate
- Available in 3.6m lengths, each weighing under 1kg
- For more specific technical information about our Speedline MF or other systems, please view or download our Speedline manual or contact our technical team
- Also available in Speedline Low Carbon

Product Code	Product Range	Width	Flange Tolerance	Gauge	Stock Length	Weight per Length
10027385	SSMF6A	26mm	28mm	0.5mm	3600mm	0.98kg