
Board Thickness	Speedline Drywall Fixing Length
12.5mm & 15mm	25mm
12.5mm + 12.5mm	25mm + 38mm
12.5mm + 15mm	25mm + 42mm
15mm + 15mm	25mm + 42mm

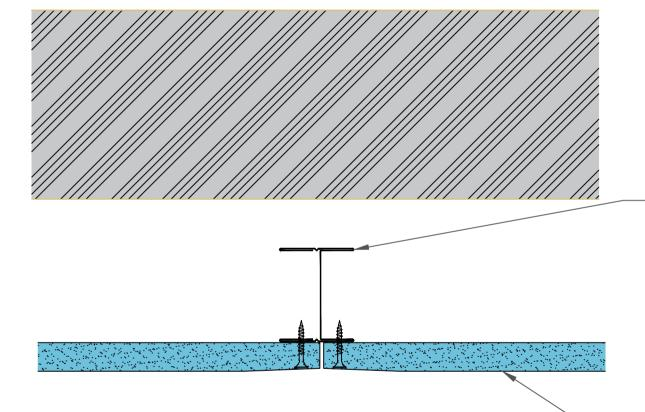

SPEEDLINE 50mm 'I' Studs at 600mm Ctrs

- 15mm Siniat GTEC dB Board fixed with SPEEDLINE Drywall Screws at 300mm centres (200mm centres at external angles). Ref to table for fixing length.

All performance date and system specifications are for systems constructed with materials & components as shown. The inclusion or substitution of any other manufacturers materials or components could invalidate test date and system performance and permission must be often to writing by SIG PI.

The information is provided in good faith and is based upon details received which are

We accept no liability for its accuracy, adequacy or completeness. Recipients must satisfy themselves as to its suitability as we do not accept responsibility for any claims or consequential loss. Acceptance of the content and subsequent design responsibility rest entirely with the recipients who should then produce accepted details on their own

CDR No:IWL50-S-54

INDEPENDENT 'I' STUD LINING

DATE: 22/10/19

10/19
16 Europa View,
Sheffield Business Park,
Sheffield

Sheffield, S9 1XH.

Adsetts House,

T: 0114 231 8030

SPEEDLINE
DRYWALL SYSTEMS | Part & plc

Details to be read in conjunction with project specification guidelines

E: enquiries@speedlinedrywall.co.uk