
Board Thickness	Speedline Drywall Fixing Length
12.5mm & 15mm	25mm
12.5mm + 12.5mm	25mm + 38mm
12.5mm + 15mm	25mm + 42mm
15mm + 15mm	25mm + 42mm

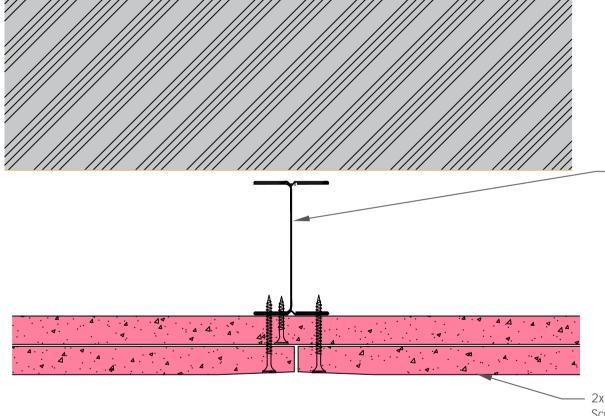

SPEEDLINE 70mm 'I' Studs at 600mm Ctrs

 2x15mm Siniat GTEC Fire Board fixed with SPEEDLINE Drywall Screws at 300mm centres (200mm centres at external angles). Ref to table for fixing length.

All performance date and system specifications are for systems constructed with materials & components as shown. The inclusion or substitution of any other manufacturers materials or components could invalidate test date and system performance and permission must be either to writing by SIGP LT.

The information is provided in good faith and is based upon details received which are

We accept no liability for its accuracy, adequacy or completeness, faciplents must satisfy financelves as to its suitability as we do not accept responsibility for any claims or consequential loss. Acceptance of the content and subsequent design responsibility rests entirely with the recipients who should then produce accepted details on their own CDR No:IWL70-S-62

INDEPENDENT 'I' STUD LINING

DATE: 23/10/19

10/19 16 Europa View, Sheffield Busines

Sheffield Business Park, Sheffield, S9 1XH.

Adsetts House,

T: 0114 231 8030

SPEEDLINE
DRYWALL SYSTEMS | Part & plc

Details to be read in conjunction with project specification guidelines

E: enquiries@speedlinedrywall.co.uk